

Features

- Made of lightweight double anodized aluminum
- Frosted lens protects light source while evenly diffusing light
- Field cuttable extrusion and lens
- Aluminum provides excellent heat dissipation
- Mounting clips and ends are available
- Compatible with all Trulux Tape Light

Available Lengths

78-3/4" (2 meter)

Available Finishes



Anodized Aluminum

Compatible Tape Light

- Trulux Single Color
- Trulux Tunable CCT
- Trulux RGB / RGB+WW

TRULUX™ Standard Flange Slot Channel

Remodeling applications can use the Standard Flange with spring clips in pairs (PE-DFSLOT-CLIP is a single), to cover a generous 3/8" along each side; or use the Invisible Slot on the facing page. The PE-DFSLOT-END (sold separately) finishes the ends, top and bottom, then snap in the slot lens over the type of tape light you choose.


Best suited applications:

Ceilings, wall slots, hallways, corridors, lobbies, theaters, accent lighting

Ordering Information

PE-DFSLOT-2M*	Flange Slot Aluminum Channel
PE-SLOTLENS-2M	Frosted Polycarbonate UV Lens
PE-DFSLOT-END*	Flange Slot End Cap
PE-DFSLOT-CLIP*	Flange Slot Spring Clip

*Standard Flange Slot Channel is available as special order only. Please allow up to 2 weeks for order processing.

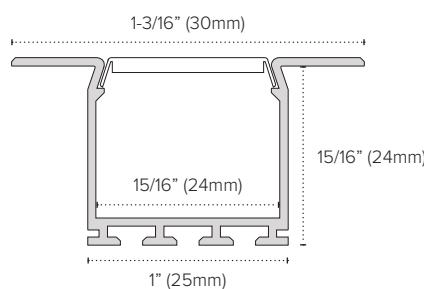

Spring clips for remodel applications